
2000SE

Electronic Component Former and Cutter Standard

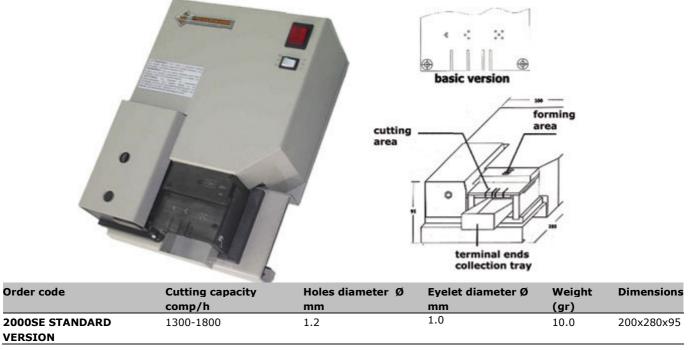


2000SE is a pneumatic machine for the forming and cutting (standard height 3 mm) of untaped electronic component terminals. 2000SE is supplied with a further cutting mask (1.5 mm height).

Holes diameter: 1.2 mm

Eyelet diameter: 1.0 mm

Several forming masks are available on request:

PREF A - TO 18



PREF A - TO 18: It forms and cuts 2.54 pitch transistors. It is possible to increase the D measure by spacing the MTA mask

* The "c" value is referred to boards of 1.5mm thickness

| Order code | a (mm) | b (mm) | c* (mm) | d(mm) |
|----------------|--------|--------|---------|-------|
| PREF A - TO 18 | 2.54 | 1.27 | 1.40 | 4.00 |






PREF A5 - TO 39 - TO5

MTA 5

PREF A5 - TO 39/TO5:


It forms and cuts 5.08 pitch transistors. It is possible to increase the D measure by spacing the MTA5 mask

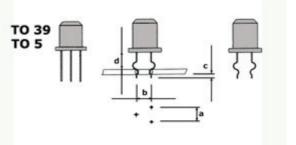

* The "c" value is referred to boards of 1.5mm thickness


| Order code | a (mm) | b (mm) | c* (mm) | d(mm) |
|-----------------|--------|--------|---------|-------|
| | | | | 4.00 |
| PREF A5 - TO 39 | 5.08 | 2.54 | 1.40 | |

PREF B - LED

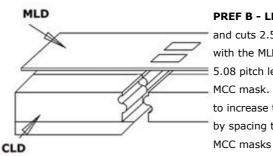

PREF B - LED: It forms and cuts 2.54 pitch led

with the MLD mask, or 5.08 pitch led with the MCC mask. It is possible to increase the D measure by spacing the MLD or the

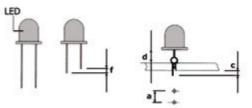


* The "c" value is referred to boards of 1.5mm thickness

| Order code | a (mm) | c* (mm) | d (mm) | f (mm) |
|--------------|-------------|-----------------|--------|--------|
| PREF B - LED | 2.54 - 5.08 | 1.40 short side | 3.50 | 0.60 |






PREF C - CAPACITOR



PREF C-CAPACITOR: It


forms and cuts the leds of 5.08 pitch capacitors. It is possible to increase the D measure by spacing the MCC mask




* The "c" value is referred to boards of 1.5mm thickness


| Order code | a (mm) | c* (mm) | d (mm) |
|------------------|--------|---------|--------|
| PREF C-CAPACITOR | 5.08 | 2.00 | 3.50 |

PREF D - LED/CAPACITOR



PREF D-LED/CAPACITOR For cutting leds and capacitors when polarity needs to be distinguished. It is possible to increase the C measure by spacing the MTC mask






* The "c" value is referred to boards of 1.5mm thickness


| Order code | a (mm) | c* (mm) | d (mm) |
|----------------------|--------|-----------|--------|
| PREF D-LED/CAPACITOR | 2.54 | 1.50-4.50 | 0.6 |



AWM Weidner Kettemerstr. 25 D-70794 Filderstadt Tel.: 0711 7009503 Fax. 0711 7009504 info@awm-weidner.de www.awm-weidner.de


PREF E - TO220

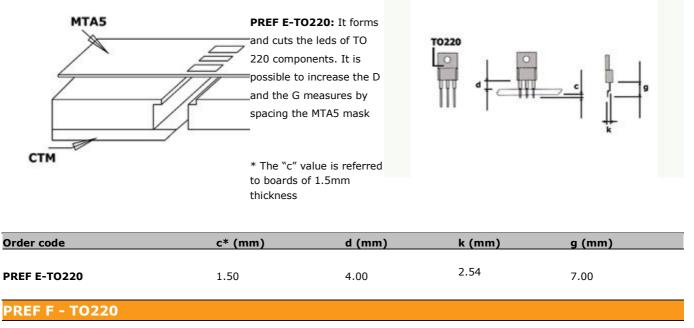


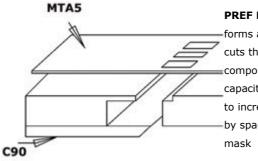

PREF F - TO220: It

forms at 90° angle and cuts the leds of TO 220 components, leds and capacitors. It is possible to increase the I measure by spacing the MTA5






* The "c" value is referred to boards of 1.5mm thickness

| Order code | c* (mm) | i (mm) | k (mm) |
|----------------|---------|--------|--------|
| PREF F - TO220 | 1.50 | 2.50 | 2.54 |




AWM Weidner Kettemerstr. 25 D-70794 Filderstadt Tel.: 0711 7009503 Fax. 0711 7009504 info@awm-weidner.de www.awm-weidner.de

PREF G - OSCILLATOR

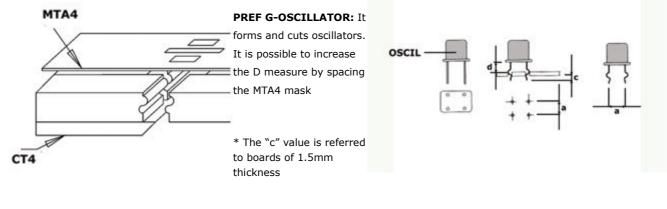


| 1 50 | 4.00 |
|------|------|
| | 1.50 |

PREF H - TO220 / CAPACITOR/LED

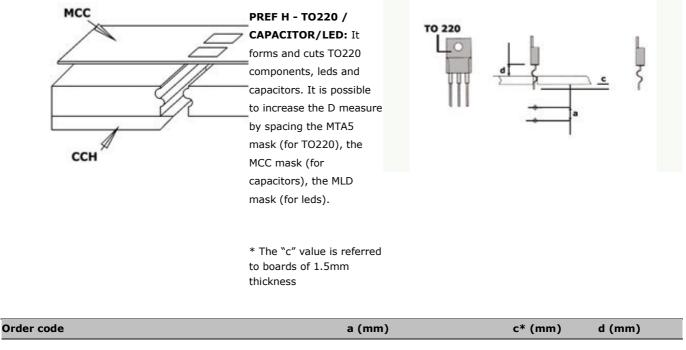

| PREF H - TO220 / CAPACITOR/LED | TO 220 conden led | 1.40 | 4.00 |
|--------------------------------|-------------------|------|------|
| | | | |



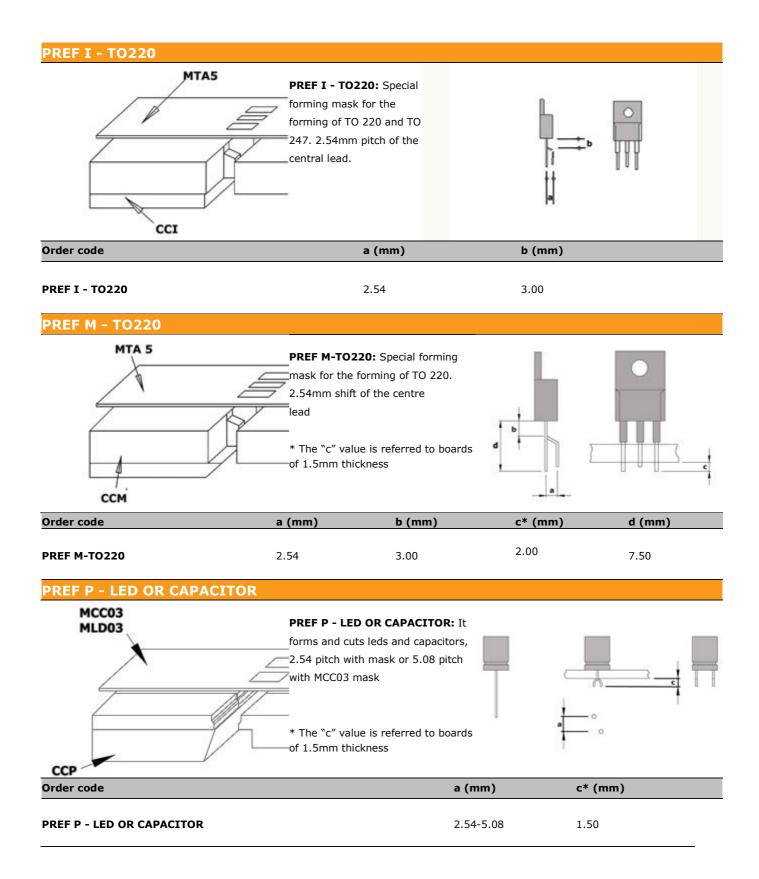

AWM Weidner Kettemerstr. 25 D-70794 Filderstadt Tel.: 0711 7009503 Fax. 0711 7009504 info@awm-weidner.de www.awm-weidner.de

